

NURO-PP-103S-V1



POWERED BY ILLUMUS. BRANDS

Power Pack Relay

FEATURES

- Power Pack providing 12V DC output power to +NURO6 sensor as needed
- Includes a built-in 6A relay for efficient control of connected lights
- NUROAir app Available on iOS and Google Play Stores
- Operating temperature: -30°C to 65°C, -22°F to 149°F
- UL Listed LED Controller
- Maximum output power of 720W

LEARN MORE
BY VISITING
OUR WEBSITE



SCAN OR
CLICK HERE



DIGITAL NAVIGATION

Explore the spec sheet through the links below

[COMPATIBLE FIXTURES](#)
[SUITABLE APPLICATIONS](#)
[LINE DRAWINGS](#)
[WIRING DIAGRAM](#)
[APP DOWNLOAD](#)

SPECIFICATIONS: NURO-PP-103S-V1

Input Voltage	120-277VAC	Dimming	Class 2, 0-10V DC	IP Rating	IP20
Frequency	50/60Hz	Sinking Current	10mA Max	Color	White
Output Voltage	120-277VAC	Housing Material	UL 94-5VA	Warranty	5 year warranty
Output Current	6A Max	Location	Indoor use only	Compliance	UL Listed LED Controller
Output Power	720W Max	Operating Temperature	-30°C to 65°C, -22°F to 149°F		

COMPATIBLE FIXTURES

- [BL Vapor Tight High Bay](#)
- [EDV Linear Tight High Bay](#)
- [UFO Parking Garage](#)
- [WTZ Linear Vapor Tight](#)
- [Skyline Area Light](#)


SUITABLE APPLICATIONS

- Food Processing
- Wet Locations
- Gymnasiums
- Distribution Centers
- Healthcare
- Education
- Parking Garage
- Warehouses
- Manufacturing Plants
- Industrial


NURO-PP-103S-V1

Power Pack Relay

LINE DRAWINGS

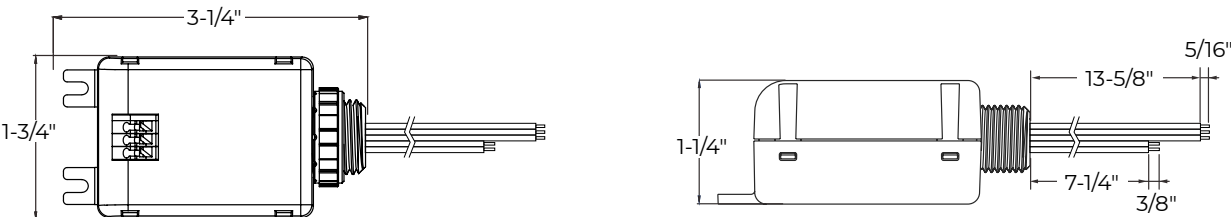

WIRING DIAGRAM

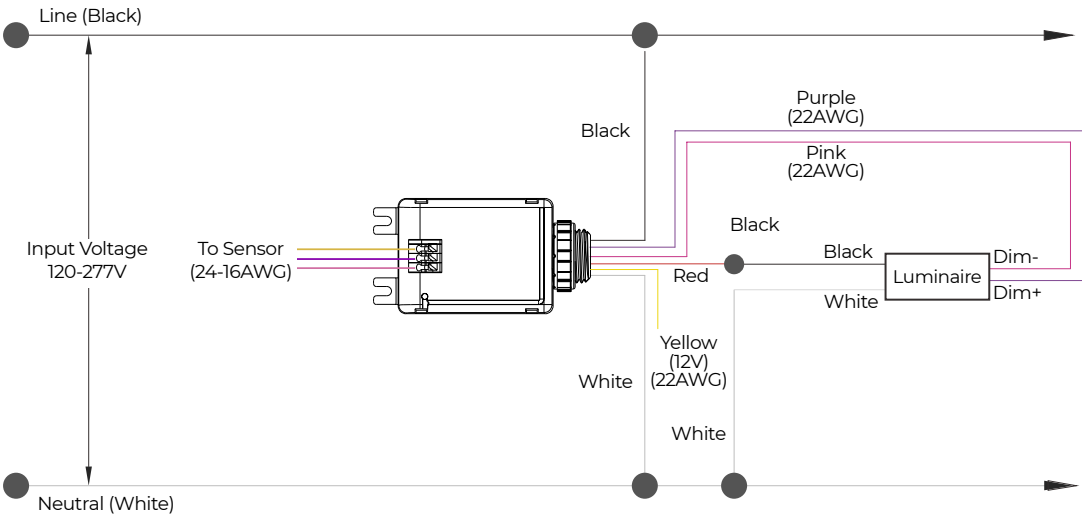

APP DOWNLOAD



Download on
the **App Store**



Get it on
Google Play



Note: All rights reserved. All sizes and specifications are subject to change at any time without notice.